


Materials

Rotary - Car / SiC / SSiC / TC
Elastomer - NBR / EPDM / Viton / Aflas / FFKM / PTFE

Working Conditions

Pressure ≤ 20 bar
Speed ≤ 25 m/s
Temperature from -40°C up to 205°C

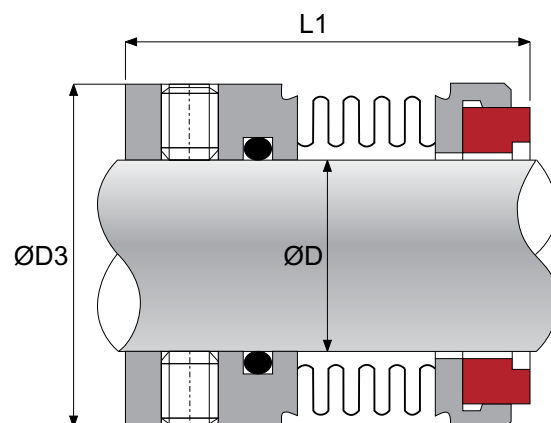

Shaft ØD	ØD3	L1
30	44.5	38
35	48.8	43
38	53.6	42
40	56.6	42
45	61.9	47
50A	65.4	46.5
50	66.3	46.5
55	72	56.5
60	76.6	56.5
65	83.5	66.5
70	90	65.5
75	93.8	65.5
80	96.8	75
85	102.7	75
90	110	75