




Materials

- Rotary - Car / SiC / SSiC / TC  
Elastomer - NBR / EPDM / Viton / Aflas / FFKM / PTFE

Working Conditions

- Pressure ≤ 15 bar  
Speed ≤ 12 m/s  
Temperature from -40°C up to 205°C

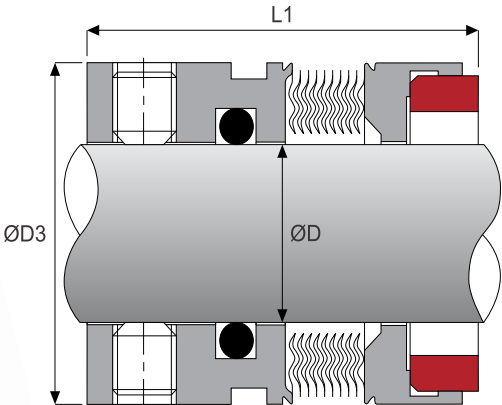

| Inches   |       |      |
|----------|-------|------|
| Shaft ØD | ØD3   | L1   |
| 19.1     | 33.3  | 31.8 |
| 22.2     | 36.8  | 31.8 |
| 23.8     | 38.1  | 31.8 |
| 25.4     | 39.7  | 31.8 |
| 28.6     | 42.8  | 31.8 |
| 31.7     | 46.0  | 33.3 |
| 34.9     | 49.2  | 36.5 |
| 38.1     | 52.4  | 36.5 |
| 41.3     | 55.5  | 36.5 |
| 44.5     | 58.7  | 36.5 |
| 47.6     | 61.9  | 38.1 |
| 50.8     | 65.1  | 38.1 |
| 54.0     | 68.2  | 38.1 |
| 57.2     | 71.4  | 39.7 |
| 60.3     | 74.6  | 39.7 |
| 63.5     | 80.9  | 39.7 |
| 66.7     | 84.1  | 41.3 |
| 69.9     | 87.3  | 41.3 |
| 73.0     | 92.1  | 42.8 |
| 76.2     | 95.3  | 42.8 |
| 79.4     | 98.4  | 44.5 |
| 82.1     | 101.6 | 44.5 |
| 85.7     | 104.8 | 44.5 |
| 88.9     | 108.0 | 47.6 |
| 92.1     | 111.1 | 47.6 |
| 95.3     | 114.3 | 47.6 |
| 98.4     | 117.5 | 47.6 |
| 101.6    | 120.7 | 47.6 |

| Metric   |       |      |
|----------|-------|------|
| Shaft ØD | ØD3   | L1   |
| 18       | 32.0  | 27.5 |
| 20       | 33.3  | 27.5 |
| 22       | 36.0  | 27.5 |
| 24       | 38.1  | 30.0 |
| 25       | 39.0  | 30.0 |
| 28       | 42.0  | 32.5 |
| 30       | 44.0  | 32.5 |
| 32       | 46.0  | 32.5 |
| 33       | 47.0  | 32.5 |
| 35       | 49.0  | 32.5 |
| 38       | 52.4  | 34.0 |
| 40       | 55.6  | 34.0 |
| 43       | 58.7  | 34.0 |
| 45       | 58.7  | 34.0 |
| 48       | 61.9  | 34.0 |
| 50       | 65.1  | 34.5 |
| 53       | 68.3  | 34.5 |
| 55       | 71.0  | 34.5 |
| 60       | 74.6  | 39.5 |
| 65       | 84.1  | 39.5 |
| 70       | 87.3  | 45.0 |
| 75       | 95.3  | 45.0 |
| 80       | 98.4  | 44.5 |
| 85       | 104.8 | 44.5 |
| 90       | 108.0 | 49.5 |
| 95       | 114.3 | 49.5 |
| 100      | 120.7 | 49.5 |